

info@lockshop.co.za
www.lockshop.co.za
LockDesk Cellphone:
084-200-1555 (Off Hrs only)
Fax: +27 (0)21-555-1801
Tel: +27 (0)21 555-1720

THE LOCKSHOP
LOCKING SINCE 1975

Distributors of locks, biometrics, door handles,
door closers, access control, panic,
emergency exit and all hardware for doors

Po Box 646 Milnerton
7435 Cape Town,
South Africa
B14 Milnerton Business
Park, Racecourse Road
Milnerton, Cape Town

Proud Southern African distributors of **DETEX** panic hardware, trusted world-wide!

DETEX V40 SERIES

Panic & Emergency Exit Hardware



ALARMED & STANDARD EXIT DEVICES

- Heavy duty 20 mm stainless steel deadlocking latch ensures automatic re-locking whenever the door closes. Up to 600 Kg holding force!
- UL listed panic hardware; UL listed fire exit hardware, ANSI/BHMA certified A156.3, UBC 97 standard 7-2 & UL10C for positive pressure.
- Exceeds USA 500,000 cycle testing requirement.
- 10 YEAR mechanical / 3 YEAR electrical limited manufacturer's warranty!

**SPECIFY AND USE *DETEX* EXIT DEVICES
WHEN ESCAPE MUST BE ALLOWED – AND MAXIMUM
PROTECTION AGAINST OUTSIDE ENTRY IS NEEDED!**

NOTE THAT DOUBLE DOORS ALWAYS REQUIRE EXTRA HARDWARE !

DETEX V40 SERIES

Abbreviated Technical Information



DETEX V40 SERIES is the heaviest, best warranted item in it's class, and meets requirements for "escape initiated by body weight" in occupancies where panic hardware is mandatory.

- Pressure against the heavy-duty panic bar opens the door, allowing escape.
- Escape is always possible regardless of the status of the power, or of the key.

DETEX V40 series are supplied standard 865mm long from end-to-end (out-of-the-box), including the standard striker. Since the door opens OUTWARDS, the entire **all** panic hardware **must pass through the door frame's INSIDE** width.

Please supply the door frame measurement from left-to-right, measured on the inside of the frame (this is usually SMALLER than the door-size). The amount that can be cut off a standard **DETEX V40** series unit depends on the model required. Models shown below are usually in stock, in Cape Town.

SUMMARY OF FEATURES & MINIMUM FRAME SIZES

DETEX V40 with internal alarm, suitable for single leaf applications:

V40 x EI

With internal alarm & micro-switches for remote monitoring,

Requires external 12 Volt DC power for the alarm
Minimum Frame-to-Frame size required is **790 mm**

V40 X EB

Stand-alone model with battery powered alarm


Minimum Frame-to-Frame size required is **810 mm**

V40 x EB x W

Rugged weatherised, alarmed version designed for outdoor use. US Mil Spec for salt fog & driving rain
Minimum Frame-to-Frame size required is **810 mm**

V40 x EE

Delayed exit models (15 secs) with full monitoring and bypass facilities. Requires 24 Volt DC to power the alarm and the delay facilities.
Minimum FRAME-to-Frame size required is **860mm**

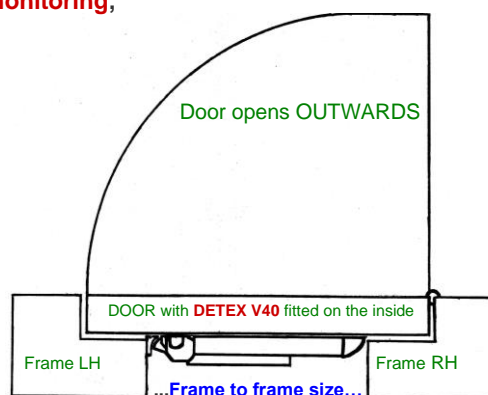

The Following **DETEX V40** models are **NOT** alarmed:

V4001 x ER

Electrically retractable latch - needs 24 Volt DC for entry, and no power to exit. NO Alarm. Monitoring is an optional extra. For monitored version specify V4001 x ER x EX
Suitable for access control where escape is always required from inside
Minimum Frame-to-Frame size required is **860 mm**

V40

Heavy-duty touch-bar panic device – mechanical only
NO alarm or monitoring facilities
Minimum Frame-to-Frame size required is **710 mm**

Please supply us with accurate measurements of the door-frame measured from the inside, with the door closed (as per drawing above) when enquiring.

We will be happy to cut units down to suit your frame-size, where possible, at no extra charge. Where door frame-sizes are too small for **DETEX V40** – we can offer other solutions.

NOTE: Double doors always require extra hardware.

Please ask for additional information on any of the above.

info@lockshop.co.za
www.lockshop.co.za
LockDesk Cellphone:
084-200-1555 (Off Hrs only)
Fax: +27 (0)21-555-1801
Tel: +27 (0)21 555-1720

THE LOCKSHOP
LOCKING SINCE 1975

Distributors of locks, biometrics, door handles,
door closers, access control, panic,
emergency exit and all hardware for doors

Po Box 646 Milnerton
7435 Cape Town,
South Africa
B14 Milnerton Business
Park, Racecourse Road
Milnerton, Cape Town


Proud Southern African distributors of **DETEX** panic hardware, trusted world-wide!

ALARMED EXIT DEVICES FOR DOUBLE DOORS: PREFERRED SOLUTION

1. TOUCH BAR WITH VERTICAL RODS TO THE FIXED LEAF

2. **DETEX** V40 SERIES ALARMED EXIT DEVICE TO THE MOVING LEAF

1. This touch bar panic device with vertical locking rods will lock the fixed (second-opening) door leaf automatically, at the top and at the bottom, whenever that leaf is closed, providing a stable object for the moving (first-opening) leaf to lock against.

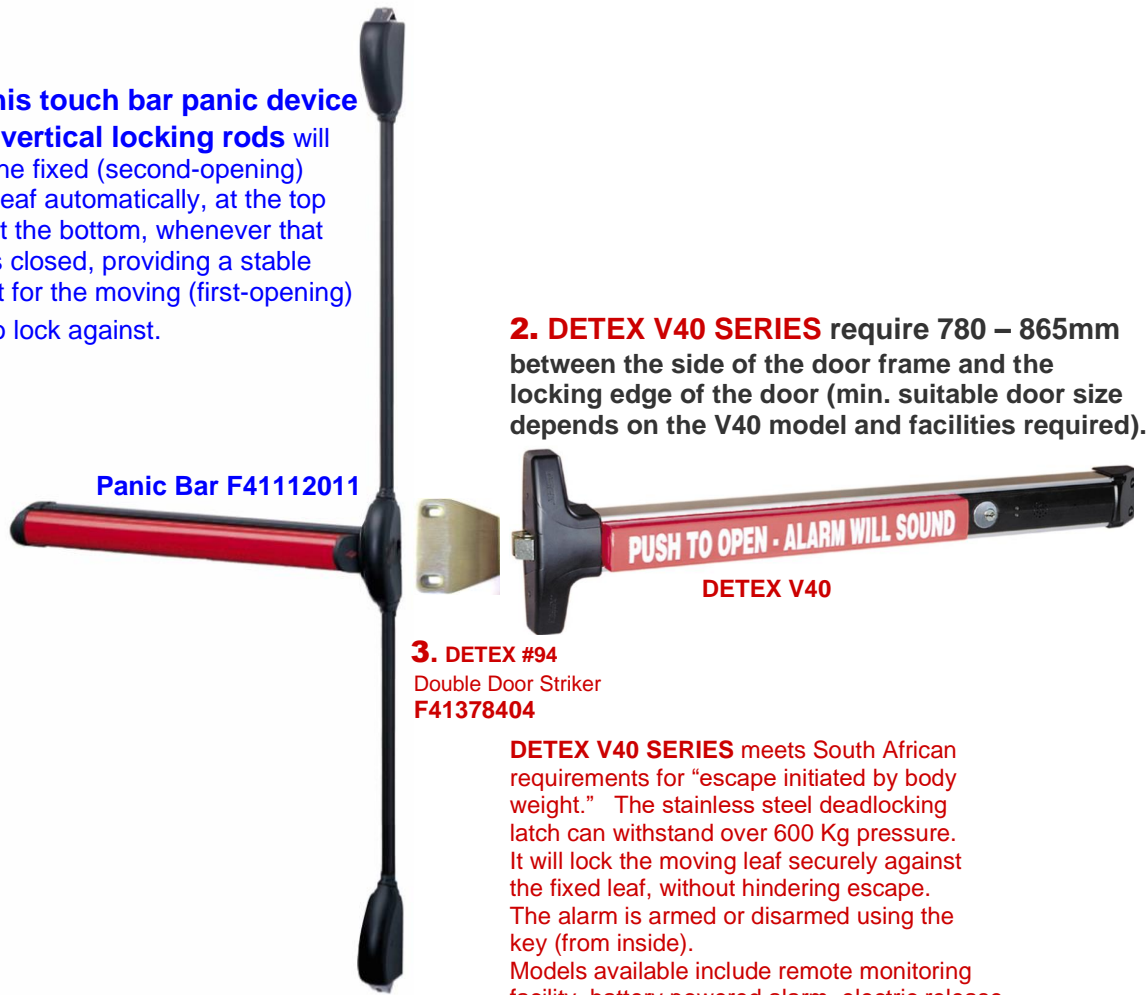

2. DETEX V40 SERIES require 780 – 865mm between the side of the door frame and the locking edge of the door (min. suitable door size depends on the V40 model and facilities required).

3. DETEX #94
Double Door Striker
F41378404

DETEX V40 SERIES meets South African requirements for “escape initiated by body weight.” The stainless steel deadlocking latch can withstand over 600 Kg pressure. It will lock the moving leaf securely against the fixed leaf, without hindering escape. The alarm is armed or disarmed using the key (from inside). Models available include remote monitoring facility, battery powered alarm, electric release facilities & a weatherised version for outdoor use.

- **PUSHING EITHER BAR WILL ALLOW BOTH DOORS TO OPEN**, meeting the statutory requirements for an outward opening, hinged, double fire escape door (and will also trigger the 95dB **DETEX** alarm).
- **ESCAPE IS ALWAYS POSSIBLE** regardless of the armed/disarmed status of the alarm, or the status of the power or electronics.

Either of the devices illustrated above devices can be used on its own, on a single door.

DOUBLE DOORS REQUIRE ITEMS 1, 2 AND 3 AS SHOWN ABOVE

Please supply the door frame measurements when asking for assistance. ‘Normal doors’ or ‘standard size’ will not enable us to determine whether doors are wide enough for DETEX V40

Key cylinders for the alarm by-pass, and for optional access from outside, can be keyed alike or master-keyed at nominal extra cost.

Optional **HIGH SECURITY CISA C3000 T06** or **ASTRAL TEKNO S01** cylinders with restricted keys are available at extra cost for the alarm bypass, and also for optional access by key from outside. These cylinders offer very high resistance to both bumping and picking and their keys are made only against authorised signatures, which must match sample signatures lodged with us.

Various *DETEX*® V40 Series Emergency Exit Devices meet the following standards



Meets/exceeds ADA requirements



UL Listed Grade 1 Panic Hardware
UL Listed Grade 1 Fire Exit Hardware for 3 hours, maximum



4'x10' single doors and pairs of 4'x8' with F90KR keyed removable mullion



IBC 97, Standard 7-2 and UL10C for positive pressure



ANSI/BHMA certified A156.3 - 2001 Grade 1



Exceeds Life Safety, CA Title 19 & 24 and all building requirements

Meets requirements of EC standard
BS EN 1125 : 1997/A1 : 2001

